

TOPBALL®

TOPBALL	
STRUCTURE AND ADVANTAGES	D-2
TYPES	D-3
LIFE CALCULATION	D-4
RELATION BETWEEN BALL CIRCUITS AND LOAD RATING	D-4
MOUNTING	D-5
ANTI-CORROSIVE TYPE	D-6
USE AND HANDLING PRECAUTIONS	D-7
DIMENSION TABLE	D-8

TOPBALL®

The NB TOPBALL is a linear motion mechanism utilizing the rotational motion of ball elements. NB's self-aligning TOPBALL can be designed into many different applications such as factory automated equipment, machine tools, industrial machines, electrical equipment, optical and measuring instruments.

STRUCTURE AND ADVANTAGES

Higher Load Capacity and Longer Travel life

NB's uniquely designed load plate provides circular arch contact to the ball element resulting in a greater dispersion of the load, enabling TOPBALL to provide up to three times the load capacity therefore 27 times the travel life of conventional slide bushings.

Self Aligning Capability

Load plates are thinner at the ends to provide a pivot point at the center of the plate. The center acts as a fulcrum to compensate for any slight misalignment between the shaft and the housing bore that might be caused by inaccurate machining, mounting errors or shaft deflection.

Straight load plate ST option is available for non self-alignment.

Floating Seal

NB's unique floating seal design allows for self-alignment while maintaining equal and constant contact to the shaft. Seals do not add to the overall length of the bushing allowing for more compact designs.

Figure D-1 Circular Arch Design and Ground Surface Raceway


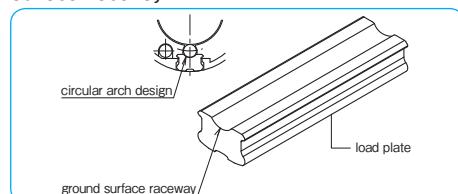


Figure D-3 Basic Structure of TK

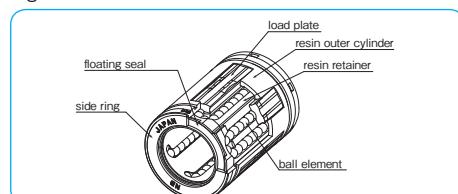

High Speed

TOPBALL meets high speed requirements. The maximum speed is 5m/s.

Clearance Adjustable

TOPBALL load plates are designed to "float" in the outer sleeve which allows for clearance between the ball elements and shaft to best suit application requirements.

TOPBALL Unit

This is a TOPBALL with a housing. The housing has the most appropriate bore tolerance that optimizes TOPBALL's performance.


Tolerance interchangeable with Asian Metric Slide Bush Type

Shaft diameter tolerance for TMF and TMA types is the same as Asian Metric slide Bush (refer to "Clearance and Fit" in page D-6).

TMF type is an easy to mount flange type.

Mounting dimensions of TMA type are the same as those of Asian Metric SMA type which makes replacement easy.

Figure D-2 Floating Seal and Self-aligning Feature

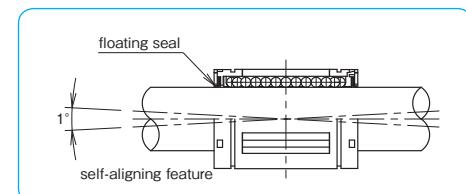

TYPES

Table D-1 Types

	Metric Series		Inch Series	
TOPBALL	closed type	TK	TW	P.D-10
	open type	TK-OP		
TOPBALL Unit	closed type	TKA	TKA-W	P.D-21
	adjustable type			
TOPBALL Unit	open type	TKE	TKE-W	P.D-23
	adjustable-open type	TKD	TKD-W	
Tolerance interchangeable with Asian Metric Slide Bush Type	TMF	TMA		P.D-25
	P.D-18	P.D-19		

LIFE CALCULATION

Since ball elements are used as the rolling element in the NB TOPBALL, the following equation is used to calculate the rated life.

$$L = \frac{(f_H \cdot f_T \cdot f_C \cdot C)^3}{f_W} \cdot 50$$

L: rated life (km) f_H: hardness coefficient
f_T: temperature coefficient f_C: contact coefficient
f_W: applied load coefficient (Table D-2)
C: basic dynamic load rating (N) P: applied load (N)
*Refer to page Eng-5 for the coefficients.

Applied Load Coefficient (f_w)

When calculating the applied load, the weight of the mass, inertial force, moment resulting from the motion, and the variation with time should be accurately estimated. However, it is very difficult to accurately estimate the applied load due to the existence of numerous variables, including the start/stop conditions of the reciprocating motion and of the shock/vibration. Estimation is simplified by using the values given in Table D-2.

RELATION BETWEEN BALL CIRCUITS AND LOAD RATING

The load rating varies according to the loaded position on the circumference. The value in the dimension table indicates the lowest load rating with the load placed on top of one ball circuit. Table D-3 shows the load ratio for the TK and TW TOPBALL.

Table D-3 Load Positions

size	TK8	TK10~TK16	TK20~TK50	TW3~TW8	TW10	TW12~TW32
C (dynamic load rating in the table)						
C _{MAX} (maximum dynamic load rating)						
load ratio C _{MAX} /C C _{MAX} /C	1.414	1.463	1.280	1.414	1.463	1.280
C _Z (dynamic load rating in reverse direction)	none					
load ratio C _Z /C C _Z /C	—	0.44	0.60	0.70	0.44	0.57

If the stroke and number of cycles per unit time are constant, the life time is calculated using the following equation.

$$L_h = \frac{L \cdot 10^3}{2 \cdot l_s \cdot n_1 \cdot 60}$$

L_h: life time (hr) l_s: stroke length (m)
L: rated life (km) n₁: number of cycles per minute (cpm)

Table D-2 Applied Load Coefficient

operating conditions	applied load coefficient f _w
no shock/vibration 0.25m/s or less	1.0~1.5
low shock/vibration 1m/s or less	1.5~2.0
high shock/vibration 1.5m/s or less	2.0~3.5
high shock/vibration 3m/s or less	3.5~4.0
5m/s or less	4.0 or more

MOUNTING

Clearance and Fit

An appropriate clearance between TOPBALL and shaft is required in TOPBALL operation. Inadequate clearance may cause early failure and/or poor, rough movement. Proper clearance is determined by shaft diameter and housing bore. Table D-4~6 show recommended tolerances of the shaft and housing bore.

Tolerance of TMF and TMA type

Shaft diameter tolerance of TMF and TMA types matches that of Asian Metric Slide Bush:g6.

Table D-6 shows recommended tolerances of TMF and TMA types. Please insert TMF type into an installation bore which is slightly larger than the outer cylinder.

Shaft and Housing

To optimize NB TOPBALL performance, high precision shafts and housings are required.

1. Shaft: Dimensional tolerance, surface roughness and hardness greatly affect the traveling performance of the TOPBALL.

The shaft must be manufactured to the following tolerances.

- A. Surface roughness of Ra0.4 or less.
- B. Hardness of 58 HRC or more (refer to page Eng-5).
- C. The proper tolerance of the shaft diameter is recommended on Table D-4 and D-5.

The NB Shaft is an ideal component manufactured to meet these specifications. Please see pages F-1 ~ for details.

2. Housing: There are a wide range of designs and manufacturing techniques for housings. NB TOPBALL Units are available as standard products. When housings are prepared separately please refer to Table D-4 and D-5 for a proper fit.

Table D-4: Recommended Tolerance for Shaft Dia. and Housing Bore

part number	shaft dia. dr mm	tol. (h6) μm	housing bore D mm	tol. (H7) μm
TK 8	8	0	16	+18/0
TK10	10	-9	19	
TK12	12	0	22	+21
TK16	16	-11	26	0
TK20	20	0	32	
TK25	25	-13	40	+25
TK30	30		47	0
TK40	40	0	62	+30
TK50	50	-16	75	0

Table D-5: Recommended Tolerance for Shaft Dia. and Housing Bore

part number	shaft dia. dr inch	tol. (g6) inch	housing bore D inch	tol. (H7) inch
TW 3	.1875	-.0002	.3750	+.0005/0
TW 4	.2500	-.0006	.5000	+.0007
TW 6	.3750		.6250	0
TW 8	.5000	-.0002	.8750	+.0008
TW10	.6250	-.0007	1.1250	0
TW12	.7500	-.0003	1.2500	+.0010
TW16	1.0000	-.0008	1.5625	0
TW20	1.2500	-.0004	2.0000	
TW24	1.5000	-.0010	2.3750	+.0012
TW32	2.0000	-.0004/-0.0012	3.0000	0

Table D-6: Recommended Tolerance (TMF,TMA type)

part number	shaft dia. dr mm	tol. (g6) μm
TMF16	—	16
TMF20	TMA20	20
TMF25	TMA25	25

Mounting

TK type TOPBALL is designed to be press fitted into the housing bore. When inserting bushing, however, don't apply excess force nor shock load which may cause permanent damage. For TW type TOPBALL, examples of mounting are shown in Figures D-4~7 and D-9.

Examples of Mounting

Figures D-4 to D-9 illustrate mounting methods as example.

Figure D-4 Use of Holding Plates

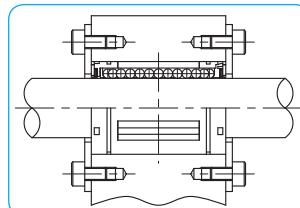


Figure D-5 Clearance Adjustable Type

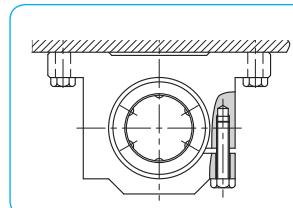


Figure D-6 Use of Retaining Rings

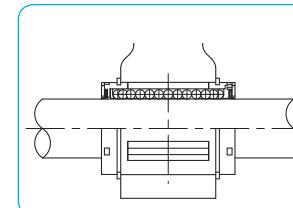


Figure D-7 Open Type

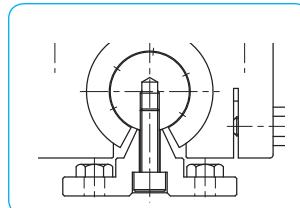


Figure D-8 Press Fit (TK type)


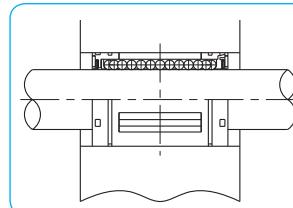


Figure D-9 Pin Fixing

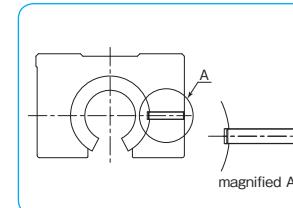

* Please contact NB for SA type support rails' compatibility with the TOPBALL units.

Retaining Ring for Mounting

It is possible to mount NB TOP BALL by retaining ring. It is recommended to select the retaining ring with reference to the Table D-6.

Figure D-10 Retaining Ring

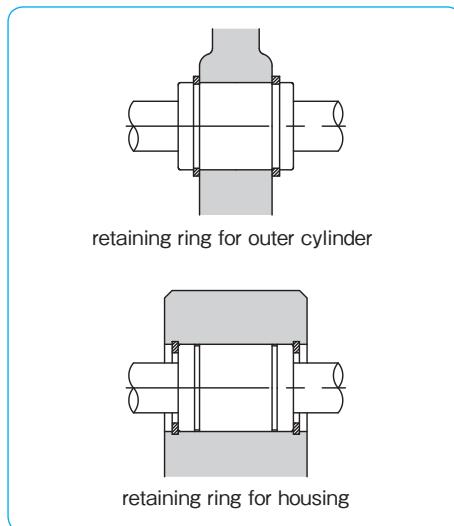


Table D-7 Applicable retaining ring

size	size of retaining ring for outer cylinder	size of retaining ring for housing
TK 8	16	16
TK10	19	19
TK12	22	22
TK16	26	26
TK20	32	32
TK25	40	40
TK30	※ 47	47
TK40	62	62
TK50	75	75

* part is not in the JIS standard. Please contact NB for details.

ANTI-CORROSIVE TYPE

A special TOPBALL is also available for anti-corrosive requirements. Please specify with a suffix "-SK" for either TOPBALL or TOPBALL Unit part number. The load plates are electroless nickel plated and balls are made of stainless steel.

Table D-8

part number	material	
	load plate	ball element
-SK	electroless nickel plate	stainless steel

USE AND HANDLING PRECAUTIONS

Rotational motion not supported

The NB TOPBALL is designed only for linear motion, so that for applications in which a combination of linear and rotational motion is a requirement, Stroke Bush (P. E-2), Slide Rotary Bush (P. E-10), or Rotary Ball Spline (P. B-32) are recommended.

Self Alignment

When used with a single bearing on a single shaft or with a single bearing each on 2 shafts, Self-Alignment causes either shafts or bearings to tilt. To avoid tilting, 2 shafts with 2 bearings on each shaft is recommended. Non-self aligned "ST" type is available only for Euro Metric TK type TOPBALL in size 12 to 40. Please contact NB for details.

Figure D-11





Figure D-12

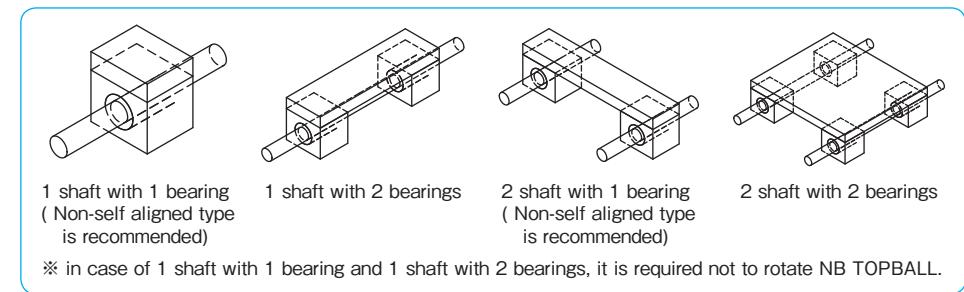

Operating Temperature Range

The operating temperature range is from -20°C to 80 °C . In case of operation at a temperature outside of this range, please contact NB.

Dust Prevention

Foreign particles and dust in the NB TOPBALL affect the motion accuracy and shorten product life. Standard seals will perform well for dust prevention under normal operating conditions, however, in harsh environment it may be necessary to attach protective covers.

Lubrication

It is important to lubricate the NB TOPBALL for an accurate operation and for a long life. Anti-rust oil is applied to the NB TOPBALL prior to shipment only. The NB selected anti-rust oil has a little to no effect on lubricants, however, please apply lubricant after cleaning the TOPBALL, for example, using kerosene, etc. For grease lubrication, lithium soap-based grease is recommended. A special low dust generating grease is also available for clean room application. Please refer to page Eng-40 for details.

Operating Speed

The maximum speed is 5m/s. Product life time may be shortened if operating speed is more than 3m/s due to wear of resin components. Please set applied load coefficient and static safety factor with a margin.

TK TYPE

— TOPBALL Metric Type —

TK type



TK-OP type



part number structure

example **TK|20|UU-OP-ST-SK**

TK type

inner contact diameter (dr)

seal
blank: without seal
UU: seals on both sidesblank: standard
SK: anti-corrosion*self aligning
blank: self-aligning
ST: non self-aligning*blank: closed
OP: open

*For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.



* ST option is available for size 12 to 40

	closed type			part number		open type			major dimensions		
	number of ball circuits	mass g		number of ball circuits	mass g	dr*	tolerance μm	D mm	L mm		
TK 8	4	7.2	—	—	—	8	+ 8	16	25		
TK10	5	13.9	—	—	—	10	0	19	29		
TK12	5	21	TK12-OP	4	17	12		22	32		
TK16	5	26	TK16-OP	4	35	16	+ 9	26	36		
TK20	6	54	TK20-OP	5	48	20	- 1	32	45		
TK25	6	122	TK25-OP	5	103	25	+11	40	58		
TK30	6	193	TK30-OP	5	177	30	- 1	47	68		
TK40	6	354	TK40-OP	5	275	40	+13	62	80		
TK50	6	615	TK50-OP	5	520	50	- 2	75	100		






One-sided seal is also available. Please contact NB for details.

* Based on nominal housing bore

Self-Aligning Type

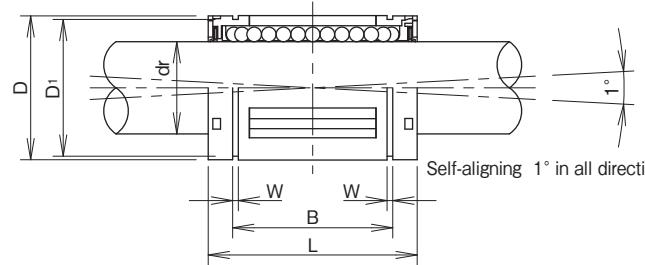

Non Self-Aligning Type

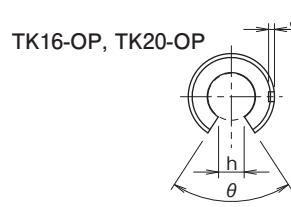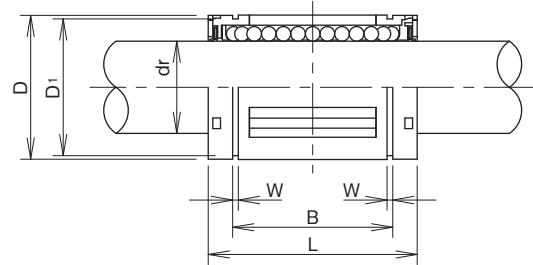

F: pin hole

B mm	W mm	D ₁ mm	h mm	θ	F ^{H11} mm	open type	G mm	J mm	basic load rating dynamic C N	static Co N	shaft diameter mm
16.5	1.1	15.2	—	—	—	—	—	—	423	534	8
22.0	1.3	18	—	—	—	—	—	—	750	935	10
22.9	1.3	21	6.5	66°	—	—	—	0.7	1,020	1,290	12
24.9	1.3	24.9	9	68°	3	—	1.0	1,250	1,550	16	
31.5	1.6	30.3	9	55°	—	—	1.0	2,090	2,630	20	
44.1	1.85	37.5	11.5	57°	1.5	1.5	3,780	4,720	25		
52.1	1.85	44.5	14	57°	2	1.7	5,470	6,810	30		
60.6	2.15	59	19.5	56°	1.5	2.4	6,590	8,230	40		
77.6	2.65	72	22.5	54°	5	2.5	2.7	10,800	13,500	50	

1N=0.102kgf

TW TYPE

— TOPBALL Inch Type —


TW type



TW-OP type



part number structure

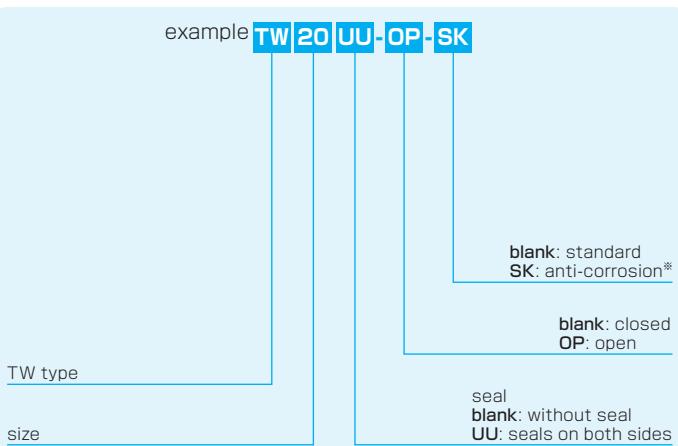example **TW|20|UU-OP-SK**


*For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

part number				open type				major dimensions		
closed type		number of ball circuits	mass lbs	number of ball circuits	mass lbs	dr*	D	L	tolerance inch	
TW	3	4	.004	—	—	.1875	.3750	.562	±.008	
TW	4	4	.009	—	—	.2500	.5000	.750	0	
TW	6	4	.014	—	—	.3750	.6250	.875	-.015	
TW	8	4	.043	TW 8-OP	3	.033	.5000	.8750	1.250	0
TW	10	5	.103	TW 10-OP	4	.083	.6250	1.1250	1.500	
TW	12	6	.123	TW 12-OP	5	.102	.7500	1.2500	1.625	-.020
TW	16	6	.265	TW 16-OP	5	.220	1.0000	1.5625	2.250	
TW	20	6	.485	TW 20-OP	5	.419	1.2500	2.0000	2.625	0/-0.025
TW	24	6	.750	TW 24-OP	5	.639	1.5000	2.3750	3.000	0/-0.030
TW	32	6	1.411	TW 32-OP	5	1.168	2.0000	3.0000	4.000	0/-0.040

* Based on nominal housing bore

** Seals are not available on TW3.

*** One-sided seal is also available. Please contact NB for details.

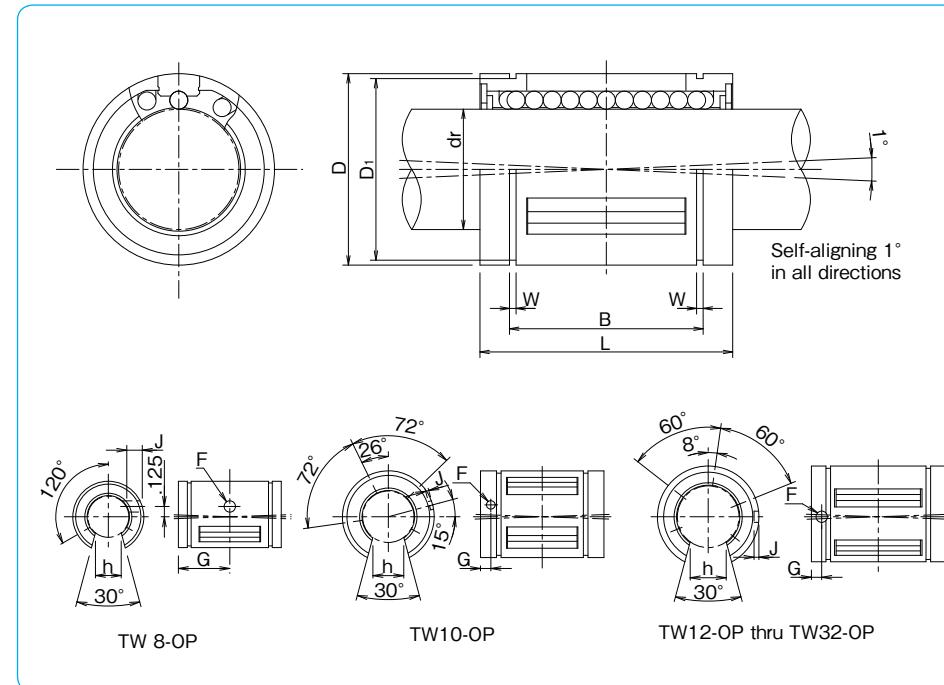

B inch	W tolerance inch	D1 inch	h inch	F inch	G inch	J inch	basic load rating dynamic C lbf	static Co lbf	nominal shaft diameter inch
—	—	—	—	—	—	—	35	47	3/16
.515	0	.0390	.4687	—	—	—	60	80	1/4
.703	-.015	.0390	.5880	—	—	—	95	120	3/8
1.032	0	.0459	.8209	.313	.136	.6250 through	230	290	1/2
1.112	0	.0559	1.0590	.375	.105	.1250	.0390	400	500
1.272	-.020	.0559	1.1760	.438	.136	.1250	.0590	470	590
1.886	0	.0679	1.4687	.563	.136	.1250	.0470	850	1,060
2.011	0/-0.025	.0679	1.8859	.625	.201	.1875	.0900	1,230	1,530
2.422	0/-0.030	.0859	2.2389	.750	.201	.1875	.0900	1,480	1,850
3.206	0/-0.040	.1029	2.8379	1.000	.265	.3125 through	2,430	3,040	2

1inch=25.4mm


1lbf≈0.454kg

1lbf≈4.448N

TKA TYPE(Euro Standard)


— Block Type —

part number structure

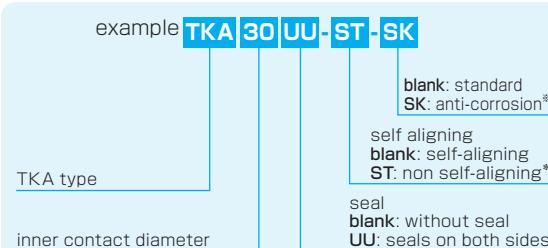

※For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

* ST option is available for size 12 to 40

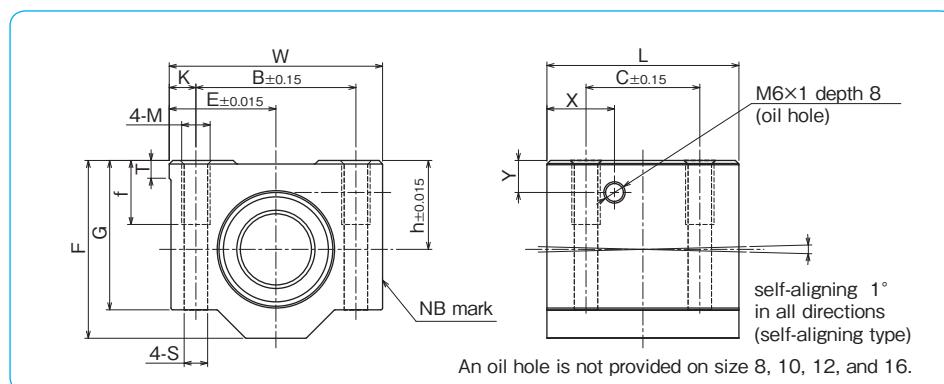

part number	inner contact diameter mm	major dimensions							mounting dimensions				basic load rating			allowable static moment Mo N·m	mass g		
		h mm	E mm	W mm	L mm	F mm	G mm	T mm	X mm	Y mm	B mm	C mm	K mm	M mm	f mm	S mm	dynamic Co N	static Co N	
TKA 8UU	8	15	17.5	35	32	28	22	5	—	—	25	20	5	M4	9	3.3	423	534	59
TKA10UU	10	16	20	40	36	31.5	25	5	—	—	29	20	5.5	M5	11	4.3	750	935	90
TKA12UU	12	18	21.5	43	39	35	28	5	—	—	32	23	5.5	M5	11	4.3	1,020	1,290	116
TKA16UU	16	22	26.5	53	43	42	35	5	—	—	40	26	6.5	M6	13	5.3	1,250	1,550	205
TKA20UU	20	25	30	60	54	50	42	5	19	9	45	32	7.5	M8	18	6.6	2,090	2,630	326
TKA25UU	25	30	39	78	67	60	48	7	22.5	10	60	40	9	M10	22	8.4	3,780	4,720	624
TKA30UU	30	35	43.5	87	79	70	58	8	26	11.5	68	45	9.5	M10	22	8.4	5,470	6,810	980
TKA40UU	40	45	54	108	91	90	72	10	26.5	14	86	58	11	M12	26	10.5	6,590	8,230	1,670
TKA50UU	50	50	66	132	113	105	85	12	43.5	12.5	108	50	12	M16	34	13.5	10,800	13,500	2,950

1N=0.102kgf


TKA-W TYPE(Euro Standard)

— Double-Wide Block Type —

part number structure



※For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

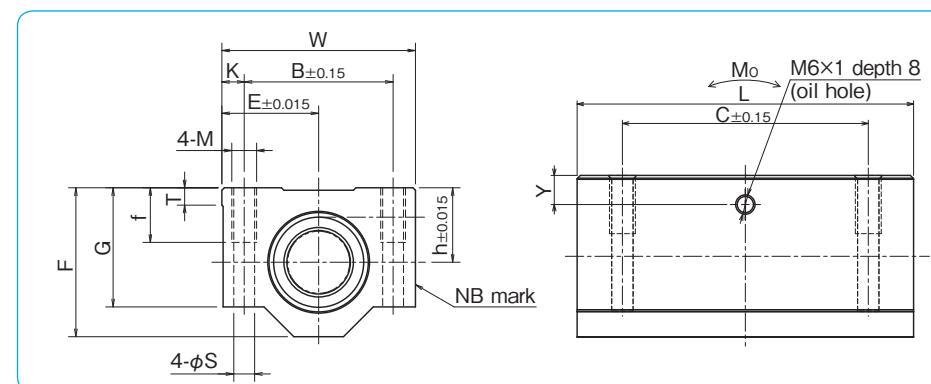

part number	inner contact diameter mm	major dimensions							mounting dimensions				basic load rating			allowable static moment Mo N·m	mass g		
		h mm	E mm	W mm	L mm	F mm	G mm	T mm	X mm	Y mm	B mm	C mm	K mm	M mm	f mm	S mm	dynamic Co N	static Co N	
TKA 8WUU	8	15	17.5	35	62	28	22	5	6.5	25	50	5	M4	9	3.3	685	1,060	6.53	119
TKA10WUU	10	16	20	40	70	31.5	25	5	7	29	52	5.5	M5	11	4.3	1,210	1,870	13.4	175
TKA12WUU	12	18	21.5	43	76	35	28	5	7.5	32	56	5.5	M5	11	4.3	1,650	2,580	20.9	227
TKA16WUU	16	22	26.5	53	84	42	35	5	9.5	40	64	6.5	M6	13	5.3	2,020	3,100	28.2	390
TKA20WUU	20	25	30	60	104	50	42	5	9	45	76	7.5	M8	18	6.6	3,390	5,260	62.0	630
TKA25WUU	25	30	39	78	130	60	48	7	10	60	94	9	M10	22	8.4	6,120	9,440	149	1,210
TKA30WUU	30	35	43.5	87	152	70	58	8	11.5	68	106	9.5	M10	22	8.4	8,860	13,600	247	1,880
TKA40WUU	40	45	54	108	176	90	72	10	14	86	124	11	M12	26	10.5	10,600	16,400	349	3,280

1N=0.102kgf

TKE TYPE(Euro Standard)


— Open Block Type —

part number structure

example	TKE	30	UU	-ST	-SK
TKE type					
inner contact diameter					
blank: standard					
SK: anti-corrosion*					
self aligning					
blank: self-aligning					
ST: non self-aligning					
seal					
blank: without seal					
UU: seals on both sides					



※For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

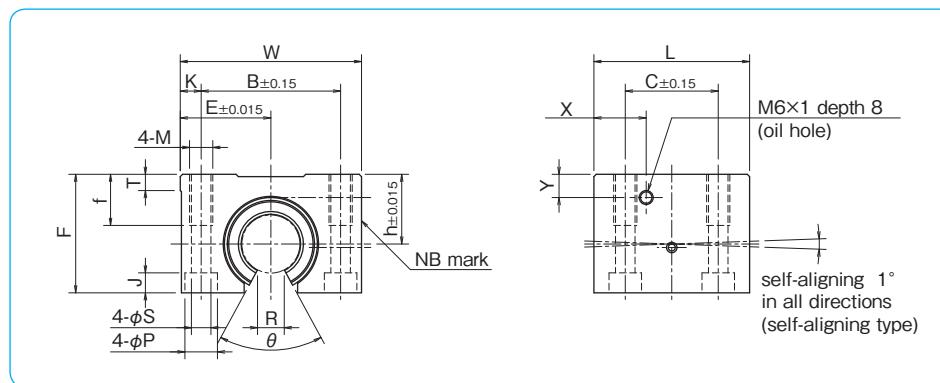

part number	major dimensions								mounting dimensions								basic load rating dynamic C static Co N	mass g				
	inner contact diameter mm	h mm	E mm	W mm	L mm	F mm	T mm	R mm	θ °	X mm	Y mm	B mm	C mm	K mm	M mm	f mm	S mm	P mm	J mm			
TKE12UU	12	18	21.5	43	39	28	5	6.5	66°	14.5	7.5	32	23	5.5	M5	11	4.3	8	4.5	1,020	1,290	99
TKE16UU	16	22	26.5	53	43	35	5	9	68°	15.5	9.5	40	26	6.5	M6	13	5.3	9.5	5.5	1,250	1,550	175
TKE20UU	20	25	30	60	54	42	5	9	55°	19	9	45	32	7.5	M8	18	6.6	11	6.5	2,090	2,630	275
TKE25UU	25	30	39	78	67	51	7	11.5	57°	22.5	10	60	40	9	M10	22	8.4	14	8.6	3,780	4,720	558
TKE30UU	30	35	43.5	87	79	60	8	14	57°	26	11.5	68	45	9.5	M10	22	8.4	14	8.6	5,470	6,810	860
TKE40UU	40	45	54	108	91	77	10	19.5	56°	26.5	14	86	58	11	M12	26	10.5	17.5	10.8	6,590	8,230	1,490
TKE50UU	50	50	66	132	113	88	12	22.5	54°	43.5	12.5	108	50	12	M16	34	13.5	20	13	10,800	13,500	2,500

1N=0.102kgf

TKE-W TYPE(Euro Standard)


— Double-Wide Open Block Type —

part number structure

example	TKE	30	W	UU	-SK
TKE type					
inner contact diameter					
blank: standard					
SK: anti-corrosion*					



※For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

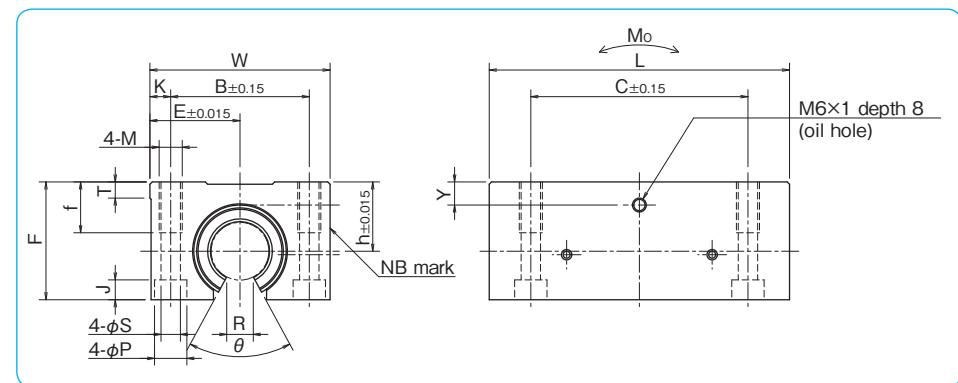

part number	major dimensions								mounting dimensions								basic load rating dynamic C static Co N	allowable static moment Mo N·m	mass g			
	inner contact diameter mm	h mm	E mm	W mm	L mm	F mm	T mm	R mm	θ °	X mm	Y mm	B mm	C mm	K mm	M mm	f mm	S mm	P mm	J mm			
TKE12WUU	12	18	21.5	43	76	28	5	6.5	66°	7.5	32	56	5.5	M5	11	4.3	8	4.5	1,650	2,580	11.3	190
TKE16WUU	16	22	26.5	53	84	35	5	9	68°	9.5	40	64	6.5	M6	13	5.3	9.5	5.5	2,020	3,100	15.2	312
TKE20WUU	20	25	30	60	104	42	5	9	55°	9	45	76	7.5	M8	18	6.6	11	6.5	3,390	5,260	35.3	505
TKE25WUU	25	30	39	78	130	51	7	11.5	57°	10	60	94	9	M10	22	8.4	14	8.6	6,120	9,440	85.2	1,050
TKE30WUU	30	35	43.5	87	152	60	8	14	57°	11.5	68	106	9.5	M10	22	8.4	14	8.6	8,860	13,600	140	1,630
TKE40WUU	40	45	54	108	176	77	10	19.5	56°	14	86	124	11	M12	26	10.5	17.5	10.8	10,600	16,400	199	2,880

1N=0.102kgf

TKD TYPE(Euro Standard)


– Clearance Adjustable Open Block Type –

part number structure

TKD type	TKD	30	UU	-ST	-SK
inner contact diameter					
	blank: standard SK: anti-corrosion*				
	self aligning blank: self-aligning ST: non self-aligning				
	seal blank: without seal UU: seals on both sides				



※For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

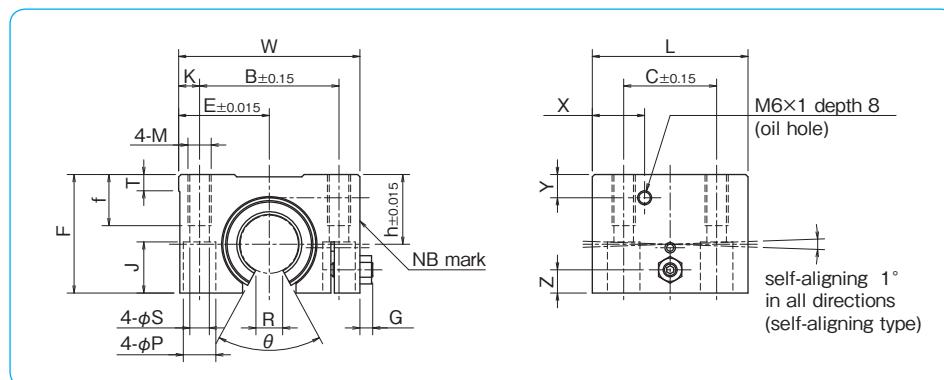

part number	inner contact diameter mm	major dimensions										mounting dimensions						basic load rating			mass g			
		h mm	E mm	W mm	L mm	F mm	G mm	Z mm	T mm	R mm	θ °	X mm	Y mm	B mm	C mm	K mm	M mm	f mm	S mm	P mm	J mm	C N	Co N	
TKD12UU	12	18	21.5	43	39	28	3.2	5	5	6.5	66°	14.5	7.5	32	23	5.5	M5	11	4.3	8	11.5	1,020	1,290	99
TKD16UU	16	22	26.5	53	43	35	3.2	6	5	9	68°	15.5	9.5	40	26	6.5	M6	13	5.3	9.5	14	1,250	1,550	175
TKD20UU	20	25	30	60	54	42	4	8	5	9	55°	19	9	45	32	7.5	M8	18	6.6	11	18	2,090	2,630	275
TKD25UU	25	30	39	78	67	51	5.5	10	7	11.5	57°	22.5	10	60	40	9	M10	22	8.4	14	22	3,780	4,720	558
TKD30UU	30	35	43.5	87	79	60	5.5	12	8	14	57°	26	11.5	68	45	9.5	M10	22	8.4	14	26	5,470	6,810	860
TKD40UU	40	45	54	108	91	77	5	15	10	19.5	56°	26.5	14	86	58	11	M12	26	10.5	17.5	33	6,590	8,230	1,490
TKD50UU	50	50	66	132	113	88	7	17	12	22.5	54°	43.5	12.5	108	50	12	M16	34	13.5	20	39	10,800	13,500	2,450

1N ≈ 0.102kgf

TKD-W TYPE(Euro Standard)


– Clearance Adjustable Double-Wide Open Block Type –

part number structure

TKD type	TKD	30	W	UU	-SK
inner contact diameter					
	blank: standard SK: anti-corrosion*				
double-wide type					



※For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

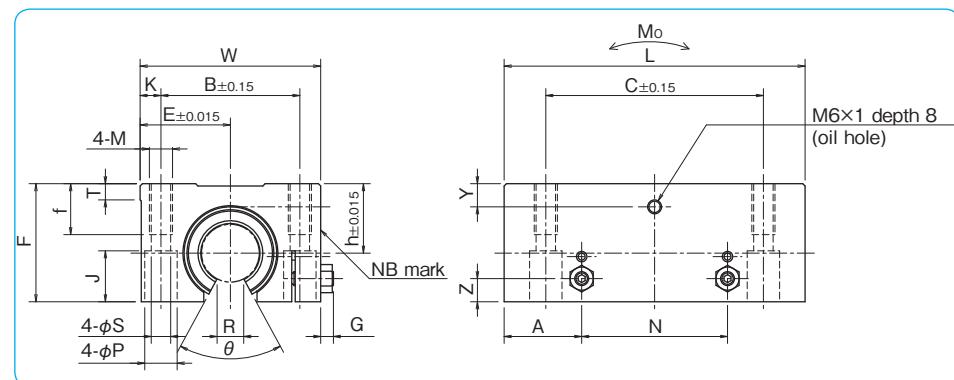




part number	inner contact diameter mm	major dimensions										mounting dimensions						basic load rating			allowable moment Mo N·m	mass g				
		h mm	E mm	W mm	L mm	F mm	G mm	Z mm	A mm	N mm	T mm	R mm	θ °	Y mm	B mm	C mm	M mm	f mm	S mm	P mm	J mm	C N	Co N			
TKD12WUU	12	18	21.5	43	76	28	3.2	5	19.5	37	5	6.5	66°	7.5	32	56	5.5	M5	11	4.3	8	11.5	1,650	2,580	11.3	190
TKD16WUU	16	22	26.5	53	84	35	3.2	6	21.5	41	5	9	68°	9.5	40	64	6.5	M6	13	5.3	9.5	14	2,020	3,100	15.2	312
TKD20WUU	20	25	30	60	104	42	4	8	27	50	5	9	55°	9	45	76	7.5	M8	18	6.6	11	18	3,390	5,260	35.3	505
TKD25WUU	25	30	39	78	130	51	5.5	10	33.5	63	7	11.5	57°	10	60	94	9	M10	22	8.4	14	22	6,120	9,440	85.2	1,050
TKD30WUU	30	35	43.5	87	152	60	5.5	12	39.5	73	8	14	57°	11.5	68	106	9.5	M10	22	8.4	14	26	8,860	13,600	140	1,630
TKD40WUU	40	45	54	108	176	77	5	15	45.5	85	10	19.5	56°	14	86	124	11	M12	26	10.5	17.5	33	10,600	16,400	199	2,880

1N ≈ 0.102kgf

TMF TYPE

— Tolerance interchangeable with
Asian Metric Slide Bush Type —

part number structure

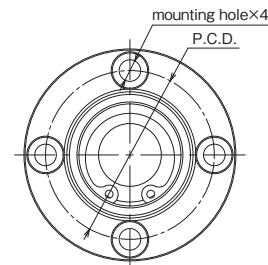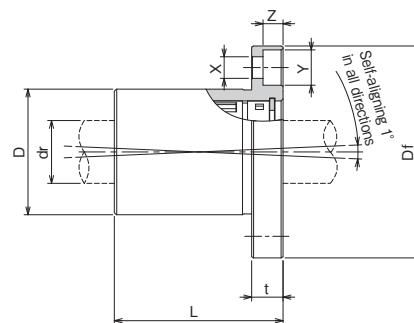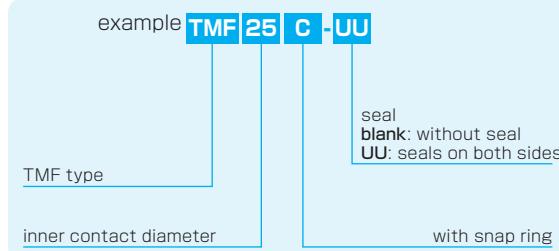




part number	number of ball circuits	dr Recommended shaft diameter : ϕ mm	major dimensions						basic load rating dynamic C N	static Co N	mass g	shaft diameter mm	
			D tolerance μ m	L mm	Df mm	t mm	P.C.D. mm	X×Y×Z mm					
TMF16CUU	5	16	32	0	43	54	8	43	5.5×9×5.1	1,250	1,550	216	16
TMF20CUU	6	20	40	-25	54	62	8	51	5.5×9×5.1	2,090	2,630	347	20
TMF25CUU	6	25	45		67	74	10	60	6.6×11×6.1	3,780	4,720	488	25

1N≈0.102kgf

TMA TYPE

— Tolerance interchangeable with
Asian Metric Slide Bush Type —

part number structure

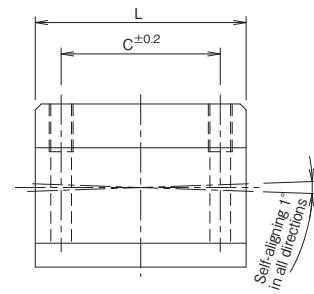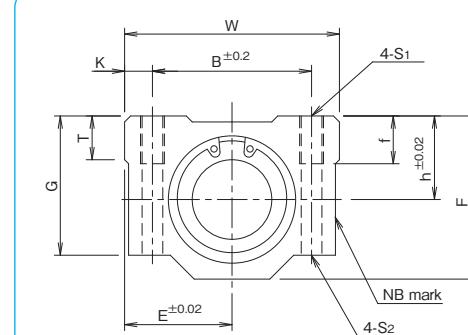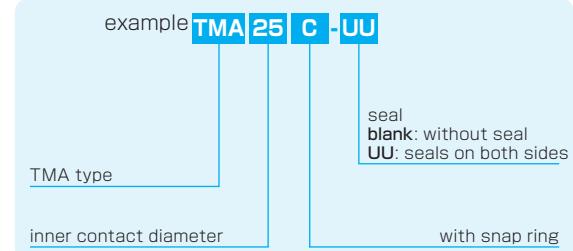

part number	inner contact diameter Recommended shaft diameter : ϕ mm	major dimensions						basic load rating dynamic C N	static Co N	mass g	shaft diameter mm	
		outer dimensions	mounting dimensions									
TMA20CUU	20	21	27	54	53	41	35	11	40	40	7	M6 12 5.2 2,090 2,630 221 20
TMA25CUU	25	26	38	76	67	51.5	42	12	54	50	11	M8 18 7 3,780 4,720 475 25

1N≈0.102kgf

TWA TYPE(Inch Standard)

— Block Type —

part number structure


example **TWA|20|UU-SK**

TWA type

size

blank: standard
SK: anti-corrosion*seal
blank: without seal
UU: seals on both sides

※For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

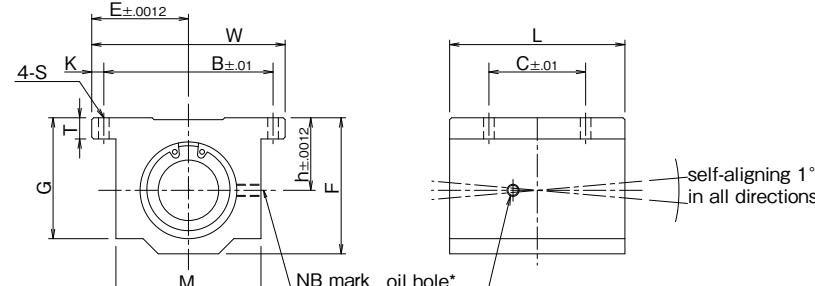

part number	nom. shaft dia. inch	major dimensions								mounting dimensions				basic load rating dynamic C lbf	static Co lbf	mass lbs
		h inch	E inch	W inch	L inch	F inch	T inch	G inch	M inch	B inch	C inch	K inch	S inch			
TWA 4UU	1/4	.4370	.8125	1.625	1.188	.813	.188	.750	1.000	1.312	.750	.156	.156	60	80	.090
TWA 6UU	3/8	.5000	.8750	1.750	1.313	.938	.188	.875	1.125	1.437	.875	.156	.156	95	120	.120
TWA 8UU	1/2	.6870	1.0000	2.000	1.688	1.250	.250	1.125	1.375	1.688	1.000	.156	.156	230	290	.248
TWA 10UU	5/8	.8750	1.2500	2.500	1.938	1.625	.281	1.437	1.750	2.125	1.125	.188	.188	400	500	.465
TWA 12UU	3/4	.9370	1.3750	2.750	2.063	1.750	.313	1.563	1.875	2.375	1.250	.188	.188	470	590	.553
TWA 16UU	1	1.1870	1.6250	3.250	2.813	2.188	.375	1.938	2.375	2.875	1.750	.188	.219	850	1060	1.200
TWA 20UU	1-1/4	1.5000	2.0000	4.000	3.625	2.813	.438	2.500	3.000	3.500	2.000	.250	.219	1230	1530	2.380
TWA 24UU	1-1/2	1.7500	2.3750	4.750	4.000	3.250	.500	2.875	3.500	4.125	2.500	.313	.281	1480	1850	3.460
TWA 32UU	2	2.1250	3.0000	6.000	5.000	4.063	.625	3.625	4.500	5.250	3.250	.375	.406	2430	3040	6.830

* Provided with push-in oil fitting for 1/4" to 1/2" sizes. Sizes from 5/8" to 2" offer a 1/4-28 tapped hole with a plug for adding a fitting if desired.

Product of NB Corporation of America

1inch=25.4mm
1lbs=0.454kg
1lbf=4.448N**TWA-W TYPE**(Inch Standard)

— Double-Wide Block Type —

part number structure

example **TWA|20|W|UU-SK**


TWA type

size

double-wide type

blank: standard
SK: anti-corrosion*seal
blank: without seal
UU: seals on both sides

※For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

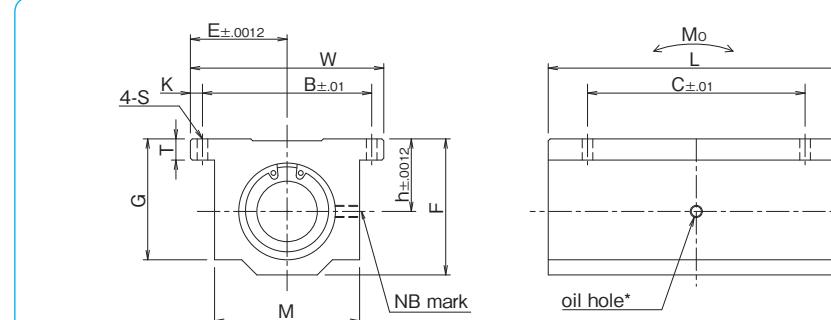

part number	nom. shaft dia. inch	major dimensions								mounting dimensions				basic load rating dynamic C lbf	static Co lbf	allowable static moment Mo lbf-in	mass lbs
		h inch	E inch	W inch	L inch	F inch	T inch	G inch	M inch	B inch	C inch	K inch	S inch				
TWA 4WUU	1/4	.4370	.8125	1.625	2.500	.813	.188	.750	1.000	1.312	2.000	.156	.156	96	160	26.8	.190
TWA 6WUU	3/8	.5000	.8750	1.750	2.750	.938	.188	.875	1.125	1.437	2.250	.156	.156	150	240	52.2	.250
TWA 8WUU	1/2	.6870	1.0000	2.000	3.500	1.250	.250	1.125	1.375	1.688	2.500	.156	.156	370	580	183	.510
TWA 10WUU	5/8	.8750	1.2500	2.500	4.000	1.625	.281	1.437	1.750	2.125	2.125	.188	.188	640	1000	373	1.000
TWA 12WUU	3/4	.9370	1.3750	2.750	4.000	2.063	.313	1.563	1.875	2.375	2.375	.188	.188	750	1180	496	1.200
TWA 16WUU	1	1.1870	1.6250	3.250	4.000	2.813	.375	1.938	2.375	2.875	1.750	.188	.219	1360	2120	1260	2.400
TWA 20WUU	1-1/4	1.5000	2.0000	4.000	4.375	3.625	.438	2.500	3.000	3.500	2.000	.250	.219	1970	3060	2100	5.000
TWA 24WUU	1-1/2	1.7500	2.3750	4.750	4.000	3.250	.500	2.875	3.500	4.125	2.500	.313	.281	2370	3700	2900	7.800


* Provided with push-in oil fitting for 1/4" to 1/2" sizes. Sizes from 5/8" to 1-1/2" offer a 1/4-28 tapped hole with a plug for adding a fitting if desired.

1inch=25.4mm
1lbs=0.454kg
1lbf=4.448N
1lbf · in=0.112N · m


TWJ TYPE (Inch Standard)

— Clearance Adjustable Block Type —

part number structure

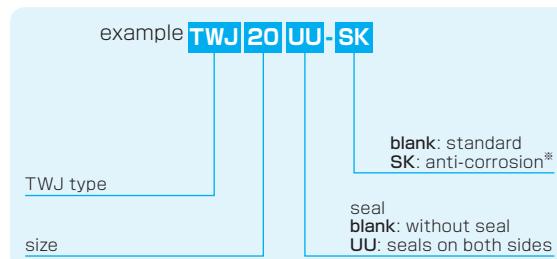

*For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

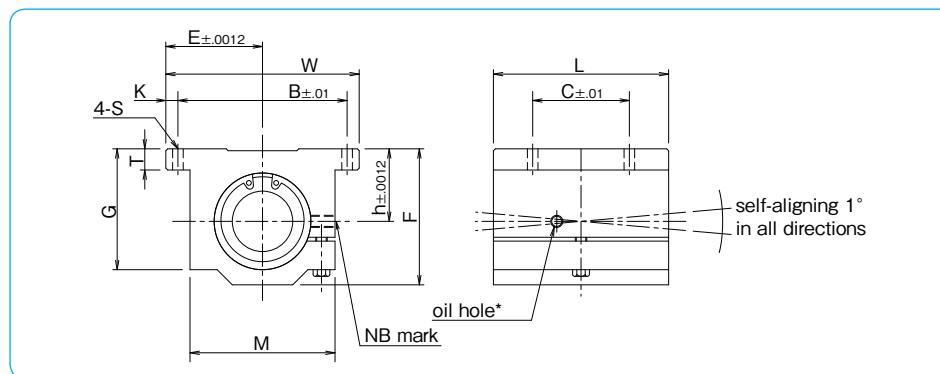

part number	nom. shaft dia. inch	major dimensions							mounting dimensions				basic load rating dynamic C lbf	static Co lbf	mass lbs	
		h inch	E inch	W inch	L inch	F inch	T inch	G inch	M inch	B inch	C inch	K inch	S inch			
TWJ 4UU	1/4	.4370	.8125	1.625	1.188	.813	.188	.750	1.000	1.312	.750	.156	.156	60	80	.090
TWJ 6UU	3/8	.5000	.8750	1.750	1.313	.938	.188	.875	1.125	1.437	.875	.156	.156	95	120	.120
TWJ 8UU	1/2	.6870	1.0000	2.000	1.688	1.250	.250	1.125	1.375	1.688	1.000	.156	.156	230	290	.248
TWJ 10UU	5/8	.8750	1.2500	2.500	1.938	1.625	.281	1.437	1.750	2.125	1.125	.188	.188	400	500	.465
TWJ 12UU	3/4	.9370	1.3750	2.750	2.063	1.750	.313	1.563	1.875	2.375	1.250	.188	.188	470	590	.553
TWJ 16UU	1	1.1870	1.6250	3.250	2.813	2.188	.375	1.938	2.375	2.875	1.750	.188	.219	850	1060	1.200
TWJ 20UU	1-1/4	1.5000	2.0000	4.000	3.625	2.813	.438	2.500	3.000	3.500	2.000	.250	.219	1230	1530	2.380
TWJ 24UU	1-1/2	1.7500	2.3750	4.750	4.000	3.250	.500	2.875	3.500	4.125	2.500	.313	.281	1480	1850	3.460
TWJ 32UU	2	2.1250	3.0000	6.000	5.000	4.063	.625	3.625	4.500	5.250	3.250	.375	.406	2430	3040	6.830

* Provided with push-in oil fitting for 1/4" to 1/2" size. Sizes from 5/8" to 2" offer a 1/4-28 tapped hole with a plug for adding a fitting if desired.

Product of NB Corporation of America


1inch=25.4mm
1lbs=0.454kg
1lbf=4.448N

1lbf · in=0.112N · m


TWJ-W TYPE (Inch Standard)

— Clearance Adjustable Double-Wide Block Type —

part number structure

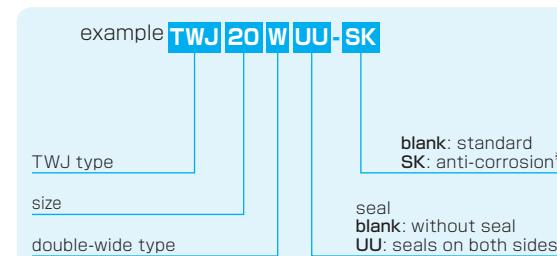

*For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

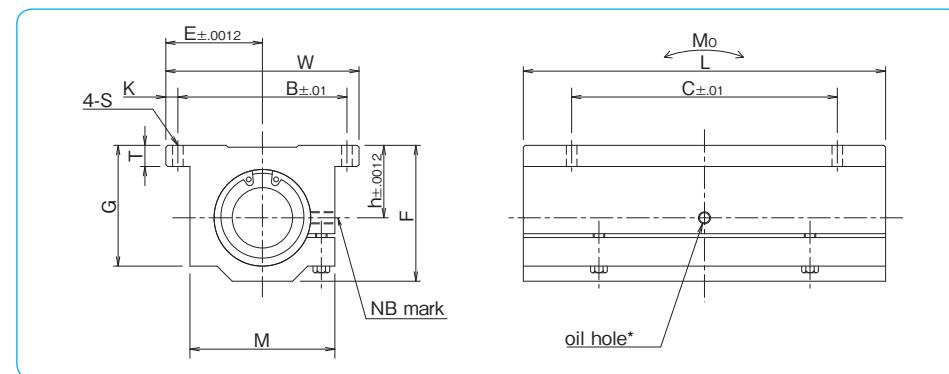

part number	nom. shaft dia. inch	major dimensions							mounting dimensions				basic load rating dynamic C lbf	static Co lbf	allowable static moment Mo lbf · in	mass lbs	
		h inch	E inch	W inch	L inch	F inch	T inch	G inch	M inch	B inch	C inch	K inch	S inch				
TWJ 4WUU	1/4	.4370	.8125	1.625	2.500	.813	.188	.750	1.000	1.312	2.000	.156	.156	96	160	26.8	.190
TWJ 6WUU	3/8	.5000	.8750	1.750	2.750	.938	.188	.875	1.125	1.437	2.250	.156	.156	150	240	52.2	.250
TWJ 8WUU	1/2	.6870	1.0000	2.000	3.500	1.250	.250	1.125	1.375	1.688	2.500	.156	.156	370	580	183	.510
TWJ 10WUU	5/8	.8750	1.2500	2.500	4.000	1.625	.281	1.437	1.750	2.125	3.000	.188	.188	640	1000	373	1.000
TWJ 12WUU	3/4	.9370	1.3750	2.750	4.500	1.750	.313	1.563	1.875	2.375	3.500	.188	.188	750	1180	496	1.200
TWJ 16WUU	1	1.1870	1.6250	3.250	6.000	2.188	.375	1.938	2.375	2.875	4.500	.188	.219	1360	2120	1260	2.400
TWJ 20WUU	1-1/4	1.5000	2.0000	4.000	7.500	2.813	.438	2.500	3.000	3.500	5.500	.250	.219	1970	3060	2100	5.000
TWJ 24WUU	1-1/2	1.7500	2.3750	4.750	9.000	3.250	.500	2.875	3.500	4.125	6.500	.313	.281	2370	3700	2900	7.800

* Provided with push-in oil fitting for 1/4" to 1/2" size. Sizes from 5/8" to 1-1/2" offer a 1/4-28 tapped hole with a plug for adding a fitting if desired.

Product of NB Corporation of America


1inch=25.4mm
1lbs=0.454kg
1lbf=4.448N

1lbf · in=0.112N · m


TWD TYPE(Inch Standard)

— Open Block Type —

part number structure

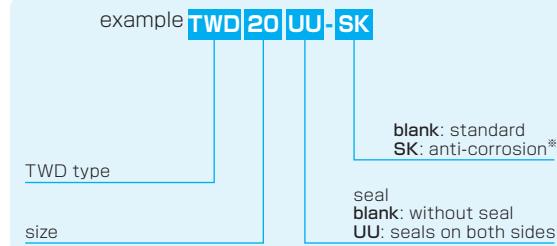

※For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

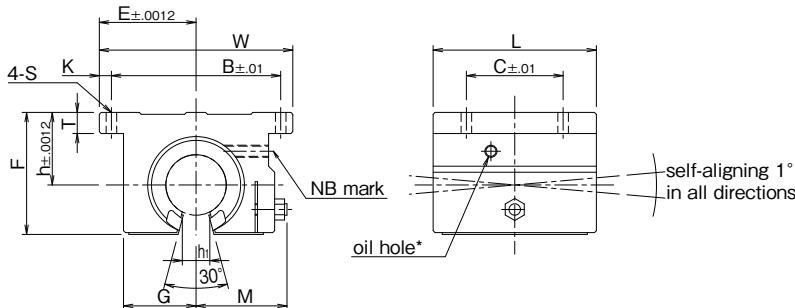

part number	nom. shaft dia. inch	major dimensions								mounting dimensions				basic load rating dynamic C lbf	static Co lbf	mass lbs	
		h inch	E inch	W inch	L inch	F inch	T inch	G inch	M inch	h1 inch	B inch	C inch	K inch	S inch			
TWD 8UU	1/2	.6870	1.000	2.000	1.500	1.100	.250	.688	.86	.260	1.688	1.000	.156	.156	230	290	.188
TWD 10UU	5/8	.8750	1.2500	2.500	1.750	1.405	.281	.875	1.06	.319	2.125	1.125	.188	.188	400	500	.365
TWD 12UU	3/4	.9370	1.3750	2.750	1.875	1.535	.315	.937	1.12	.386	2.375	1.250	.188	.188	470	590	.452
TWD 16UU	1	1.1870	1.6250	3.250	2.625	1.975	.375	1.188	1.40	.512	2.875	1.750	.188	.218	850	1060	1.010
TWD 20UU	1-1/4	1.5000	2.0000	4.000	3.375	2.485	.437	1.500	1.88	.596	3.500	2.000	.250	.218	1230	1530	1.980
TWD 24UU	1-1/2	1.7500	2.3750	4.750	3.750	2.910	.500	1.750	2.12	.681	4.125	2.500	.313	.281	1480	1850	2.950
TWD 32UU	2	2.1250	3.0000	6.000	4.750	3.660	.625	2.250	2.70	.933	5.250	3.250	.375	.406	2430	3040	5.840

* Provided with push-in oil fitting for 1/2" size only. Sizes from 5/8" to 2" offer a 1/4-28

1inch=25.4mm

tapped hole with a plug for adding a fitting if desired.

1lbs=0.454kg


Product of NB Corporation of America

1lbf=4.448N


TWD-W TYPE(Inch Standard)

— Double-Wide Open Block Type —

part number structure

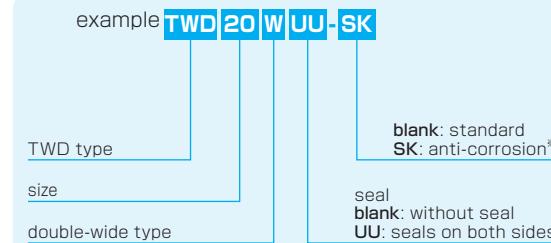

※For anti-corrosion the load plates are electroless nickel plated with stainless steel balls.

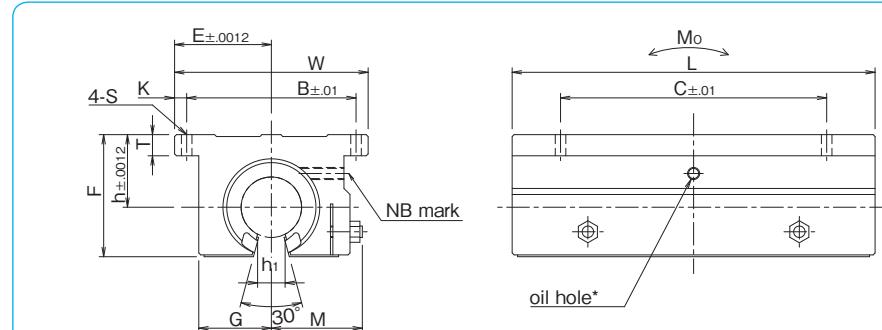

part number	nom. shaft dia. inch	major dimensions								mounting dimensions				basic load rating dynamic C lbf	static Co lbf	allowable static moment Mo lbf·in	mass lbs	
		h inch	E inch	W inch	L inch	F inch	T inch	G inch	M inch	h1 inch	B inch	C inch	K inch	S inch				
TWD 8WUU	1/2	.6870	1.000	2.000	3.500	1.100	.250	.688	.86	.260	1.688	2.500	.156	.156	370	580	128	.400
TWD 10WUU	5/8	.8750	1.2500	2.500	4.000	1.405	.281	.875	1.06	.319	2.125	3.000	.188	.188	640	1000	164	.800
TWD 12WUU	3/4	.9370	1.3750	2.750	4.500	1.535	.315	.937	1.12	.386	2.375	3.500	.188	.188	750	1180	283	1.000
TWD 16WUU	1	1.1870	1.6250	3.250	6.000	1.975	.375	1.188	1.40	.512	2.875	4.500	.188	.218	1360	2120	719	2.000
TWD 20WUU	1-1/4	1.5000	2.0000	4.000	7.500	2.485	.437	1.500	1.88	.596	3.500	5.500	.250	.218	1970	3060	1200	4.200
TWD 24WUU	1-1/2	1.7500	2.3750	4.750	9.000	2.910	.500	1.750	2.12	.681	4.125	6.500	.313	.281	2370	3700	1650	6.700

* Provided with push-in oil fitting for 1/2" size only. Sizes from 5/8" to 1-1/2" offer a 1/4-28

1inch=25.4mm

tapped hole with a plug for adding a fitting if desired.

1lbs=0.454kg

Product of NB Corporation of America

1lbf=4.448N

1lbf · in=0.112N · m